



VERROU COMPRESSION CARRE 6 D

81-7-8777


Gewicht (g)	91 g

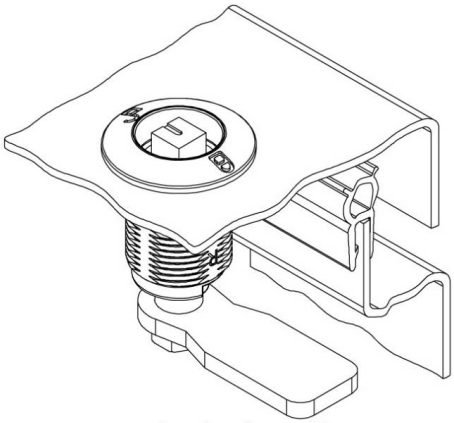

open, unlatched position

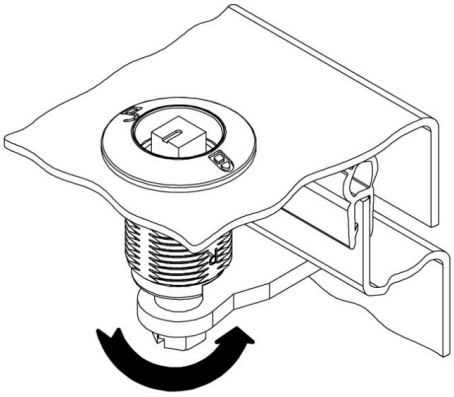

First 90° rotation: the cam latches behind the frame into the locked position. The door cannot be opened.

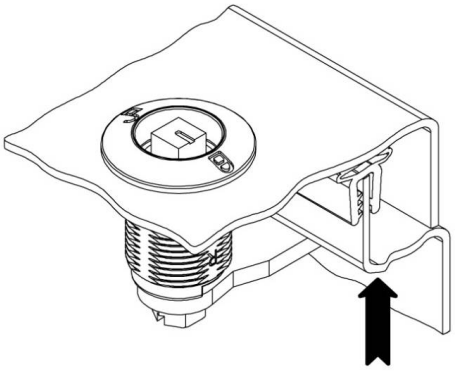

A further 90° rotation will pull the already latched cam towards the frame: the seal is compressed, the door is latched and free of play.

Compression Latch with Cam and Accessories

248-91AA.00- X Y L CC

Insert version and Design:	**Accessories on table a):**	**Assembling of Cam:**	**length of Cam:**	**Cranked Cam CC:**
RH or LH see table a)	0= without Accessories 1= Serrated lock washer 840-6798.00-00023 2= Dustcap 200-4103.00-00000 3= Serrated lock washer + Dustcap	0= without Cam 1= Cam not assembled 3= Cam assembled, positively bent Cam	0= without Cam 1= L35 2= L45	see table b)

