

SPRINGLOADED BOLT - REVERSIBLE BOLT

16-7-3835



Slam bolt - reversible.

Bolt can be manually unassembled to be positioned 'nose-up' or 'nose-down'.

Minimum load 50 N for full bolt travel.

A	63.2 mm
----------	---------

Note	bolt delivered 'nose-down'
Material	304 stainless steel
Weight (g)	185 g
B	57 mm
C	17.2 mm
Finish	raw

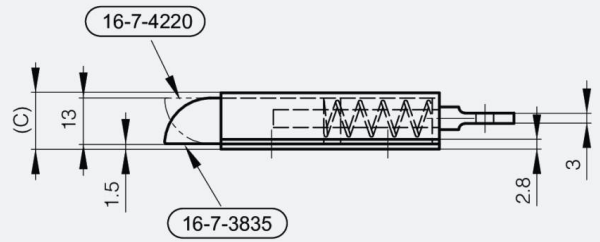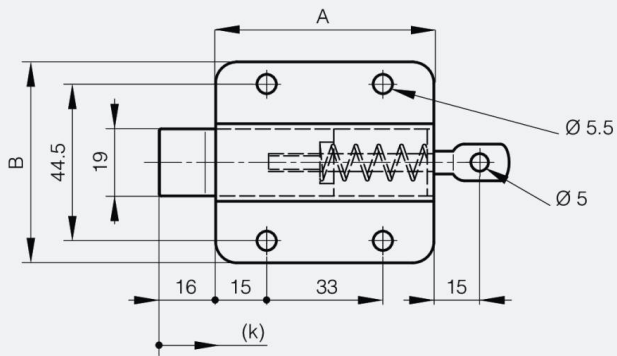

K	7 mm
----------	------