

## **SPRINGLOADED BOLT - REVERSIBLE BOLT**

**16-7-4220**



Slam bolt - reversible.

Bolt can be manually unassembled to be positioned 'nose-up' or 'nose-down'.

Minimum load 50 N for full bolt travel.

<b>A</b>	63.2 mm
----------	---------

<b>Note</b>	bolt delivered 'nose-up'
<b>Material</b>	steel
<b>Weight (g)</b>	185 g
<b>B</b>	57 mm
<b>C</b>	17.2 mm
<b>Finish</b>	zinc plated

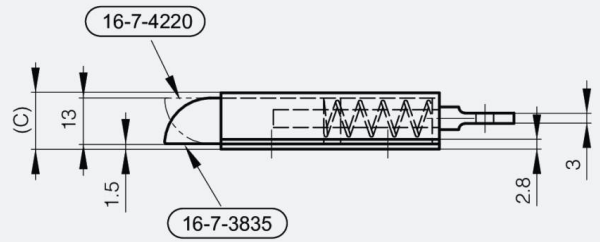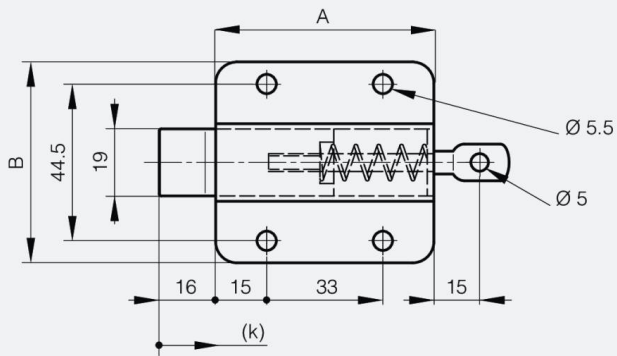

<b>K</b>	7 mm
----------	------