



## **DUAL BALL CATCHES A**


**16-7-3470**

Coutersunk on both sides of the catch.  
Strike can be secured on 4 sides of the catch.  
Body of the catch: zinc die-cast with brass finish.  
Balls: in steel  
Strike: in steel with brass finish.

**A**

60 mm

<b>Material</b>	zinc die-cast
<b>Weight (g)</b>	38 g
<b>B</b>	14.6 mm
<b>C</b>	14.7 mm
<b>E (knuckle or thickness)</b>	3 mm
<b>D (pin diameter)</b>	38
<b>F (pitch)</b>	48 mm
<b>G (pitch)</b>	27 mm
<b>H (height or starting holes)</b>	42 mm
<b>Finish</b>	brass
<b>J</b>	10.2 mm
<b>L</b>	2 mm

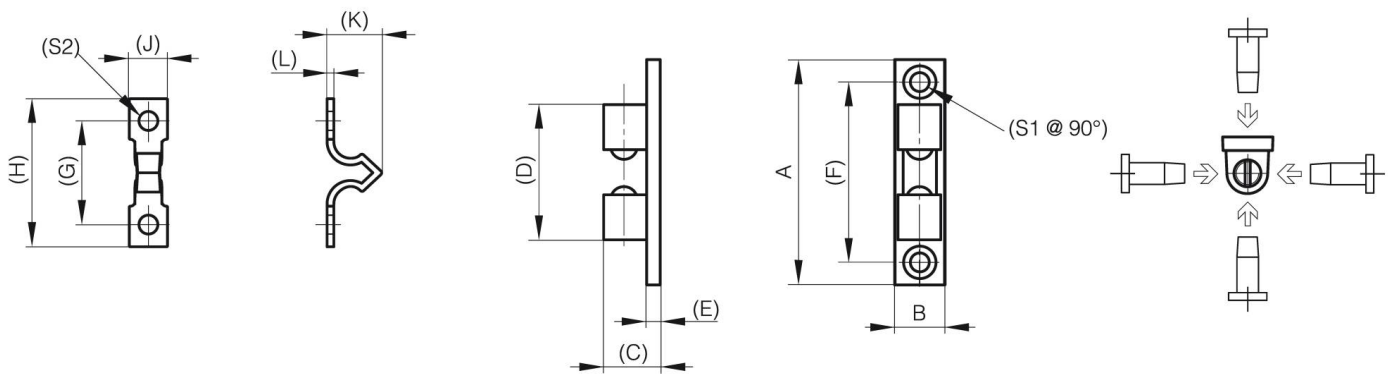

<b>K</b>	20 mm
----------	-------