CONTINUOUS GOOSENECK CONCEALED HINGES - 90° OPENING

70-1-3669

Invisible hinges for sheet metal applications.
For mounted or nested doors.
Oblong holes for a better fit.
Hinges recommended for maximum panels thickness of 2 mm max.

A (length)	500 mm
Material	Steel
Weight (g)	1600 g
B (width)	59 mm
C	2 mm
E	40 mm
D (pin diameter)	8 mm
G (pitch)	85 mm
H	37,5 mm
Finish	Zinc plated
Pin material	Stainless steel
Nouvelle référence	NEW

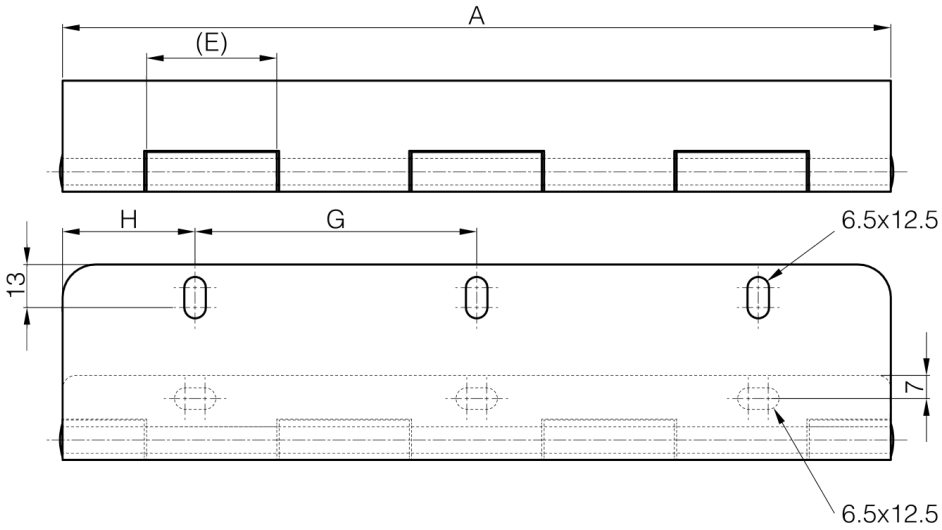
A
(E)
H
G
6.5x12.5
13
7
6.5x12.5


B
33.5
6
6
D
C
24.3
25.5